

# GIASCO

SAFETY SHOES



TM



FUTURE IS UNDER YOUR FEET

BOOK **2023**



# MANAGEMENT SYSTEM CERTIFICATE

DNV-GL



R&D IN ITALY



INJECTION IN ITALY



TECHNOLOGY



**CERTIFICATIONS**




**PROMPT DELIVERY SERVICE**



**DESIGN**



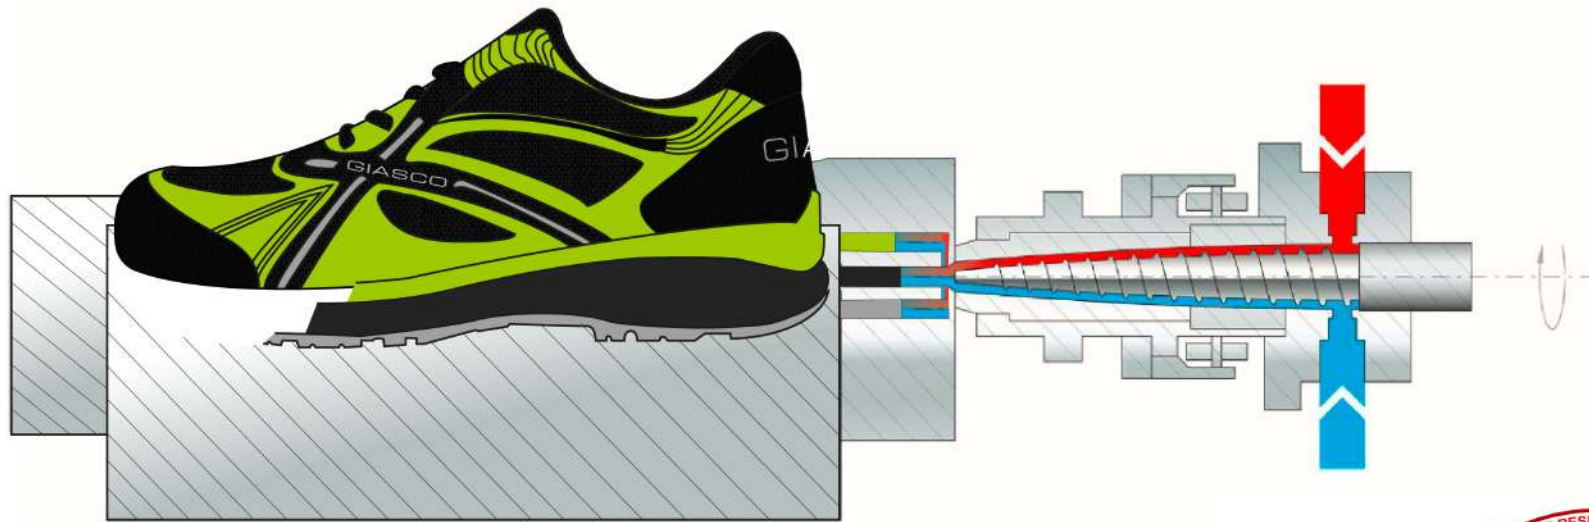






## THE FIRST SHOE WITH **3** PU *DENSITIES* INJECTED



TECHNOLOGY

**3PU INJECTION SEQUENCES**

-  3D è una tecnologia rivoluzionaria brevettata che permette di offrire l'unica calzatura con 3 diversi strati di poliuretano iniettati su tomaia. Obiettivo di questo prodotto è quello di offrire Sicurezza, il massimo Comfort e una sicura Stabilità del piede grazie alle 3 densità che caratterizzano i vari strati della suola.
-  3D is a patented revolutionary technology that allows us to offer the only shoe with 3 different layers of polyurethane injected on the upper. The aim of this product is to offer Safety, maximum Comfort and Secure foot stability thanks to the 3 densities that characterize the various layers of the sole.
-  3D es una tecnología revolucionaria patentada que nos permite ofrecer el único zapato con 3 niveles diferentes de poliuretano inyectados en el corte. El objetivo de este producto es ofrecer seguridad, el máximo confort y una estabilidad segura del pie gracias a las tres densidades que caracterizan las distintas capas de la suela.
-  3D est une technologie révolutionnaire brevetée qui nous permet d'offrir la première chaussure avec 3 couches différentes de polyuréthane injecté sur la tige. Le but de ce produit c'est d'offrir sécurité, un confort optimal et de garantir la stabilité du pied grâce aux 3 densités qui caractérisent les différentes couches de la semelle.
-  3D ist eine revolutionäre und patentierte Technologie, die es gestattet einen einzigartigen Schuh mit drei verschiedenen Schichten aus in das Oberleder injiziertem Polyurethan anzubieten. Das Ziel dieses Produkts ist es, dem Fuß dank der drei unterschiedlichen Dichten der verschiedenen Schichten der Sohle einen maximalen Komfort sowie eine sichere Stabilität zu bieten.

# ***3ULTRA***

***TRIPLE YOUR  
RESISTANCE***



# ***3CROSS***

***TRIPLE YOUR  
STABILITY***



# ***3ULTRA RUBBER***

***TRIPLE YOUR  
RESISTANCE***



# ***3HYBRID***

***TRIPLE YOUR  
COMFORT***



# ***3RUN***

***TRIPLE YOUR  
STYLE***



# ***3MOVE***


***TRIPLE YOUR  
MOBILITY***





3PU PATENT

# BULTRA

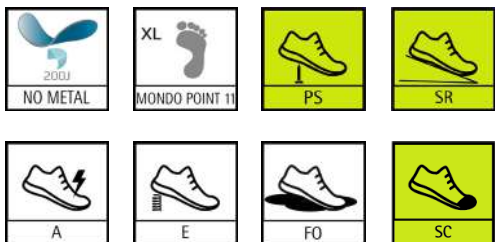

## TECHNOLOGY 3PU INJECTION SEQUENCES





**NEW**

OPAL S1PS FO SC SR 3U434N  
37-49



**NEW**

SILVER S7S FO CI SC SR 3U451L  
37-49



**NEW**

GOLD S7S FO CI SC SR 3U458L  
37-49



**NEW**

ZIRCON S3S FO SC SR 3U481D  
37-49



**NEW**

TOPAZ S3S FO SC SR 3U488D  
37-49




**NEW**

QUARTZ S3S FO CI SC SR 3U017G  
39-47



# BULTRA RUBBER



**ICE GRIP**  
**PATENTED**  
outsole design

ANTI-TORSION INSERT

BENDING POINT

TILTED HEEL TO  
IMPROVE THE WALKING

ANTI-SLIPPING HEEL

ANTISHOCK








**NEW**

LOBBIA S7S FO CI HI HRO SC SR 3RUB451L  
38-49




**NEW**

TRIGLAV S7S FO CI HI HRO SC SR 3RUB458L  
38-49



**NEW**

AROLLA S7S FO CI HI HRO SC SR 3RUB459L  
38-49



**NEW**

MARMOLADA S7S FO CI HI HRO SC SR 3RUB179E  
38-49



ICE GRIP  
PATENTED  
OUTSOLE DESIGN



BULTRA RUBBER



**3PU PATENT**

# 3MOVE



**SRC**  
ANTI-SLIPPING SOLE


*extra  
LIGHT  
shoes*



**TECHNOLOGY**  
3PU INJECTION SEQUENCES



**PATENTED**  
outsole design

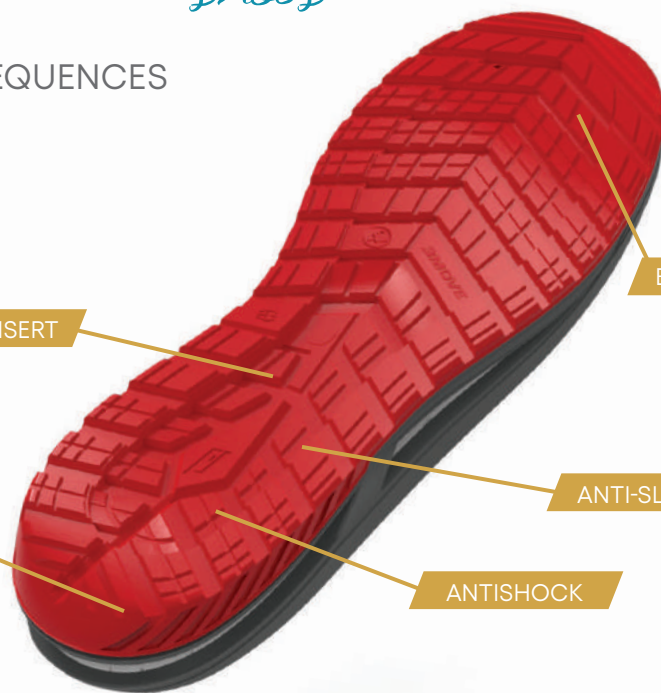

ANTI-TORSION INSERT

BENDING POINT

TILTED HEEL TO  
IMPROVE THE WALKING

ANTI-SLIPPING HEEL

ANTISHOCK



COMFORT

STABILITY

ANTISLIP



**NEW**

FOX S3  
36-47

3M453N



**NEW**

TIGER S3  
36-47

3M457N



**NEW**

LION S3  
36-47

3M184K



**NEW**

CHEETAH S1P  
39-47

3M184Y



**3PU PATENT**

**PATENTED**  
outsale design




**3MOVE**



LEOPARD S1P 3M454T  
36-47



SHARK S1P 3M450N  
36-47



MAKO S1P 3M182T  
36-47



FALCON S3 3M474NA  
36-47



**3PU PATENT**

**PATENTED**  
outsale design



**3MOVE**



3PU PATENT

# 3HYBRID



**SRC**  
ANTI-SLIPPING SOLE

*extra  
LIGHT  
shoes*



**TECHNOLOGY**  
3PU INJECTION SEQUENCES





PAG S3L FO SR  
36-47

3H063N



**NEW**

KRK S3L FO SR  
36-47

3H149N



SAMOA S1P  
36-47

3H085N




FIJI S3  
39-47

3H142EV



BALI S3  
36-47

3H149EV



**3PU PATENT**

**3HYBRID**



LAS VEGAS S1P  
36-47

3H154EC



IBIZA S3L FO SR  
36-47

3H154NK



LIPARI S1PL FO SR  
36-47

3H182NG



PONZA S3L FO SR  
36-47

3H025NG



BORNEO S3  
36-47

3H037NG





ARUBA S3  
36-47

3H192EV



MYKONOS S1P  
36-47

3H192ER



BURGAZ S1P  
36-47

3H184J



GOTLAND S1P  
39-47

3H224EJ







**FUERTEVENTURA S1P** 3H433N  
36-47



**PANAREA S1P** 3H174V  
36-47



**MALÈ S3** 3H022H  
39-47



**SYLT S1P** 3H432Y  
39-47





USTICA S2  
36-47

3H0021



CORFU S2  
36-47

3H0020



MAUI S3  
36-47

3H1911



ZANTE S1P  
36-47

3H0951




MINORCA S2  
36-47

3H0201




**CHEMICAL RESISTANCE**



**BLACK MICROWASH**  
Laboratory tests for the determination of chemical resistance (sodium hydroxide 40 % K) of upper material in accordance with analogue method EN 13832-3:2018.

**WHITE MICROWASH**  
Laboratory tests for the determination of chemical resistance (N, P, R, K, NaCl 37%\*) of upper material in accordance with analogue method EN 13832-3:2018.



Laboratory tests for the determination of chemical resistance (N, P, R, K, NaCl 37%) of SOLE material in accordance with analogue method EN 13832-3:2018.

- KUBE/ERGO black;
- KUBE white;
- 3CROSS/3RUN orange;
- 3HYBRID/ERGO light grey.

\* K - sodium hydroxide 40 %; N - acetic acid 99 %; P - hydrogen peroxide 30 %; R - sodium hypochlorite (13 ± 1) % of active chloride; NaCl 37% - sodium chloride 37%;



3PU PATENT


# 3CROSS



NO METAL



MONDO POINT 11



A



E



FO

**SRC**  
ANTI-SLIPPING SOLE



**TECHNOLOGY**  
3PU INJECTION SEQUENCES





STELVIO S3 CI  
39-47

3C224N



**NEW**

CERVINO S3L FO SR  
39-47

3C184G



MAKALU S3 CI WR  
38-47

3C058G



ELBRUS S3  
36-47

3C198N



K2 S3 CI  
39-47

3C149E



HIMALAYA S3 CI WR  
39-47

3C178E





ANETO S3 3C1910

36-47

- CHEMICAL RESISTANCE
- ANTI TORSION
- HIGH VISIBILITY
- MICROWASH
- DRUV 112-191



TRIVOR S3 3C1980

36-47

- CHEMICAL RESISTANCE
- ANTI TORSION
- HIGH VISIBILITY
- MICROWASH
- DRUV 112-191



20.000V

ASTM 2413-11  
C.S.A. Z195-14

INSULATING SOLE  
FROM >1000 MO

THOMSON SB FO E P CI WRU 3C060D

38-47

- ANTI TORSION
- HIGH VISIBILITY
- CI - 17°C



SINAI S1P 3C182T

36-47

- ANTI TORSION
- HIGH VISIBILITY
- DRUV 112-191



KAMET S3 CI 3C122D

39-47

- FIREPROOF THREAD
- ANTI TORSION
- HIGH VISIBILITY
- CI - 17°C
- DRUV 112-191



EIGER S3 3C022H

39-47

- ANTI TORSION
- PREMIUM FINISHING
- DRUV 112-191



3PU PATENT


# 3RUN



NO METAL



MONDO POINT 11



A



E



FO

**SRC**  
ANTI-SLIPPING SOLE

*extra  
LIGHT  
shoes*



**TECHNOLOGY**  
3PU INJECTION SEQUENCES





**BERG S3** 3R171R

39-47








**JARBO S3** 3R453N

36-47










**OSTRO S3** 3R457N

36-47


**OROSHI S1P** 3R172T

36-47












**FLOW SB FO E P CI WRU** 3R022E

36-47





	ASTM 2413-11	
	C.S.A. Z195-14	
INSULATING SOLE FROM >1000 MQ 		



**LIGHT SB FO E P CI WRU** 3R198E

36-47






	ASTM 2413-11	
	C.S.A. Z195-14	
INSULATING SOLE FROM >1000 MQ 		



LIBECCIO S1P  
36-47

3R085N




GHIBLI S1P  
36-47

3R182T



HURRICANE S3  
39-47

3R171V



SHAMAL S3  
36-47

3R173O



BURAN S3  
36-47

3R191O



CIENZO S3  
36-47


3R198O





BEST SLIPPING RESISTANCE

**KUBE**




**SRC**  
ANTI-SLIPPING SOLE

**PERFECT GRIP**

*extra*  
**LIGHT**  
*shoes*

**ROOF GRIP UNI 11583:2015**

COEFFICIENTE D'ATTRITO SECONDO LA PROVA UNI EN ISO 13287  
FRICTION COEFFICIENT ACCORDING TO THE TEST UNI EN ISO 13287  
ANTISTATIC PU/PU - DOUBLE DENSITY SOLE

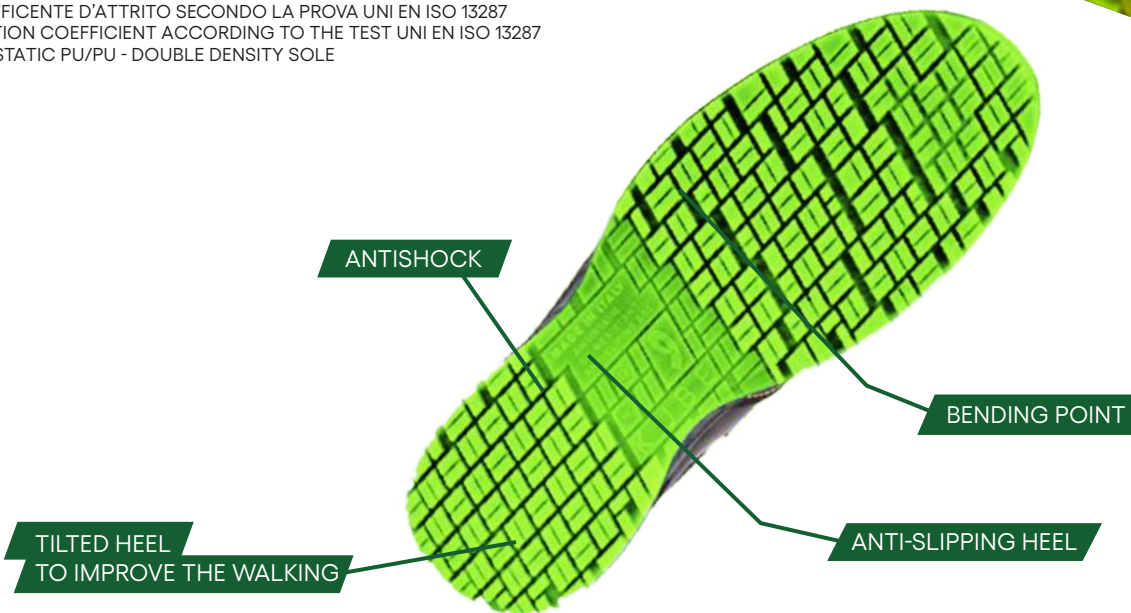



**GOLF NEW S3**  
39-47



KU142EV



**LIBRA NEW S3**  
36-49



KU149EV



**MIAMI S1P**  
35-47



KU093N



**RUGBY S3**  
36-47



KU025N



**BASKET S3**  
36-47



KU037N





**NORDIC S3**  
36-47

KU043N



**BOXE S3**  
39-47

KU065N



**KARATE S3**  
39-47

KU069N



**PERÙ S1P**  
34-47

KU095T



**BOSTON S3**  
36-47

KU051L



**DANCE S1P**  
35-42

KU055HF



*Cady*



PANAMA S1P  
35-49

KU083T



KAYAK S3  
36-47

KU025T



SOFTBALL S3  
39-47

KU037T



VOLARE S3  
36-47

KU474NA



YORK S3  
35-49

KU061D



OXFORD S3  
35-49

KU068D





MEDINA S2

KU0020



VILNIUS S3

KU0250



FREE SB FO A E

KU0070



POLO S2

KU0021



STOCKHOLM S3

KU1911



HELSINKI SB FO A E

KU0071



BALTIC S2

KU0201



CONSTANTA S2

KU8801





ICEBERG S2 CI

KU0111




ANTISTATIC PU/PU -  
DOUBLE DENSITY SOLE  
**ERGO SAFE**



**SRC**  
ANTI-SLIPPING SOLE

*extra*  
**LIGHT**  
*shoes*

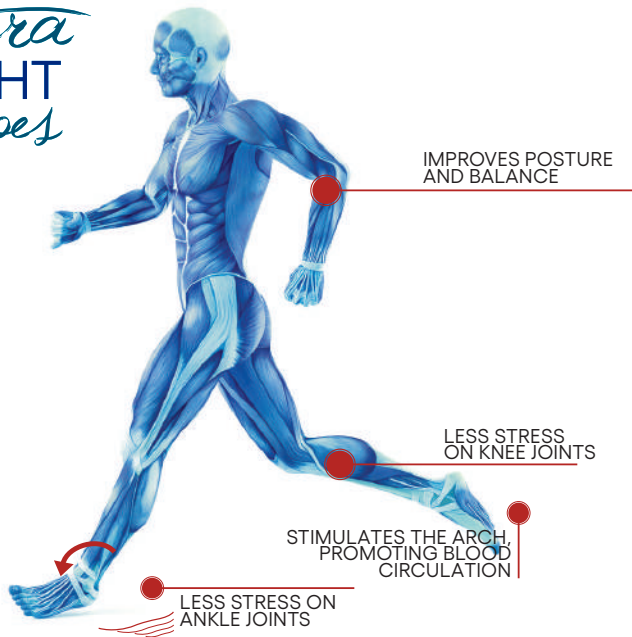



SANTA FE S1P

36-47



71T83C



SOCCER S3

36-47



ER025T



VOLLEYBALL S3

39-47



ER037T



HAITI S1P

36-47



71N93C



SPORT S3

36-47



73N25C




GYM S3

36-47



73N37C



LIMA S1P

36-47



71T95C



ARENDA S2

36-47



72O02



BERGEN S2

36-47



72102



ERGO SAFE

ANTISTATIC PU/PU -  
DOUBLE DENSITY SOLE  
**STABILE**



						<b>SRC</b> ANTI-SLIPPING SOLE
NO METAL	XL	A	E	FO	ANTI TORSION	



KÖLN S3 CI WR TO058L  
39-47

--	--	--	--	--	--	--



DEFENDER S3 CI WR AN TO159D  
39-47

--	--	--	--	--	--	--



HANNOVER S3 CI WR TO169N  
39-47

--	--	--	--	--	--	--






ALASKA S3 CI WR TO084B  
39-47



BILBAO S3 CI WR TO149G  
39-47



DAKOTA S3 CI TO011D  
39-47



TITAN S3 CI TO011G  
39-47



MALAGA S3 TO061D  
39-47



GRANADA S3 TO068D  
39-47




STRAUSS S3 TO880BP  
39-47



STABILE

ANTISTATIC PU/PU -  
DOUBLE DENSITY SOLE  
***ACTION***



**SRC**  
ANTI-SLIPPING SOLE



**GULF S3**  
39-47


AC011A



**BIG SIZE**

**KENT S3**  
36-51


AC061D



**BIG SIZE**

**CAMBRIDGE S3**  
36-51

AC068D





**HAMBURG S3 CI WR** AC058L  
36-49



**IRON RM S3** AC068DRM  
37-47




**SOLDADOR S3** AC880BSP  
39-47



**MOZART S2** AC810B  
36-47





**VERDI S2** AC880B  
36-47




**VERDI S3 R** AC880BRP  
39-47



ANTISTATIC PU -  
RUBBER SOLE  
**HARD ROCK**

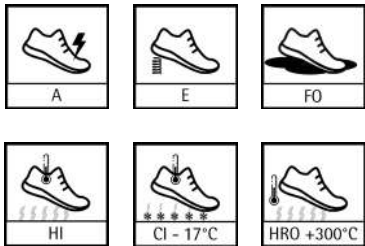

**SRC**  
ANTI-SLIPPING SOLE

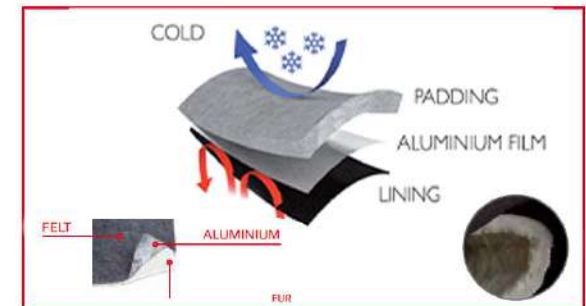

**ANTIBACTERIAL TECHNOLOGY**



CAIRO S3 CI HI HRO  
39-47

HR068D



KIEL S3 CI HI WR HRO  
37-48

HR058L



ALPI S3 CI HI WR HRO  
37-47

HR058G



GRANADA S3 CI HI HRO  
37-47

HR051L



WELDER S3L FO CI HI HRO SC SR  
39-47

HR122D



ERCOLANO S3 HI HRO  
39-47

HR066D



**HARD ROCK**  
ANTISTATIC PU - RUBBER SOLE



**METATARSAL PROTECTION**  
protection resisting till 100 JOULE

M-PROTECTION S3 HI HRO M HR470EMR  
39-47



WOODCUT S3 CI HI WR HRO (80236)  
39-47



WINTER S3 CI HI WR HRO HR011L  
39-47



ARTIC S3 CI HI WR HRO HR179E  
39-47



QUEBEC S3 CI HI WR HRO HR178E  
39-47



**HARD ROCK**  
ANTISTATIC PU - RUBBER SOLE

INSULATING PU/PU/PU SOLE  
INSULATING PU / RUBBER SOLE

# ***DIELECTRIC SOLE LINE***



## **C.S.A. Z195-14**

DIELECTRIC SOLE LINE exceeds requirements fixed from the Canadian norm CSA for electrical resistance. Determination of Electric Shock Resistance to a potential of **20.000 V** / 60 Hz, for a period of 1 min.



## **ASTM 2413 - 11**

DIELECTRIC SOLE LINE exceeds requirements electrical resistance (EH) in accordance with ASTM 2413 - 11 electric hazard - Voltage: **20.000 V** / 60 Hz - duration: 1 min. - requirement of the electrical flow lower than 1.0 mA.



## **INSULATING SOLE FROM > 1000 MΩ**

The bottom of the shoe, within some limits (no humidity, it does not concern the upper), offers electrical resistance against tension up to 1.000V - M Ω > 1.000

**3RUN**



FLOW SB FO E P CI WRU 3R022E  
36-47



**3RUN**



LIGHT SB FO E P CI WRU 3R198E  
36-47



**HARD ROCK**



SAMEL SB FO E P CI HI WRU HRO  
HRD155D  
38-47



**3CROSS**



THOMSON SB FO E P CI WRU  
3C060D  
38-47



**DIELECTRIC SOLE LINE**  
INSULATING PU / RUBBER SOLE  
INSULATING PU/PU/PU SOLE





VOLT SB FO E P HRO  
39-47 HRD055H



HERTZ SB FO E P HRO  
39-47 HRD154T



FRANKLIN SB FO E P CI HI WRU HRO  
HRD052T  
37-47



EDISON SB FO E P CI HI WRU HRO  
HRD060D  
37-48



TESLA SB FO E P CI HI WRU WR HRO  
HRD057E  
39-47



**DIELECTRIC SOLE LINE**  
INSULATING PU / RUBBER SOLE  
INSULATING PU/PU/PU SOLE

# PROFESSIONAL *CITY*



NO METAL



XL  
MONDO POINT 11



A



E



FO


**SRC**  
ANTI-SLIPPING SOLE

HIDDEN  
OUTSOLE  
TECHNOLOGY

TILTED HEEL  
TO IMPROVE THE WALKING

BENDING POINT

ANTI-SLIPPING HEEL

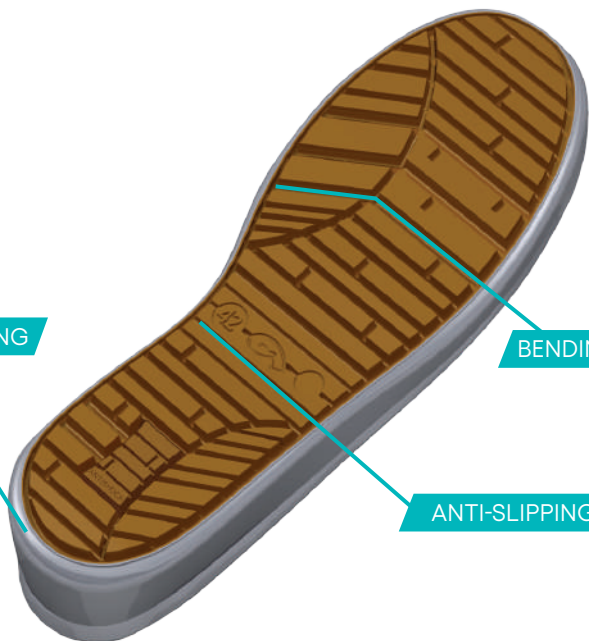



EAGLE O2 FO  
36-47

C7004I



SNAKE O2 FO  
36-47

C7181O



SPIDER O1P FO  
36-47

C7154N



MALMO O2 FO CI  
36-47

C7025O




LUTON O3 FO  
36-47

C7068OC





1000  
36-49



MEMORY  
36-47



4000  
35-47



5000  
34-49



DIELECTRIC  
37-47



GA514-10  
110 cm



GA513-10  
90 cm



GA509-10  
CM 67X32X28





SB=



S1=SB+E+A+FO  
CLOSED SEAT REGION



S1P=SB+E+A+P+FO



S2=S1+WRU



S3=S2+P+  
CLEATED OUTSOLE



SB=



S1=SB+E+A  
CLOSED HEEL AREA



S1P=SB+E+A+P



S1PL=SB+E+A+PL



S1PS=SB+E+A+PS



S2=S1+WPA



S3=S2+P+  
CLEATED OUTSOLE



S3L=S2+PL+  
CLEATED OUTSOLE



S3S=S2+PS+  
CLEATED OUTSOLE



S6=S2+WR



S7=S3+WR



S7L=S3L+WR



S7S=S3S+WR



UNI EN ISO 20347:2012




OB=

basic requirement

O1=OB+E+A  
CLOSED SEAT REGION



O1P=OB+E+A+P



O2=O1+WRU



O3=O2+P+  
CLEATED OUTSOLE



roof certification  
UNI 11583:2015



UKCA marking UKCA  
United Kingdom



USA STANDARD  
astm 2413-18  
IMPACT/COMPRESSION



NEW 20345:2022



20345:2012



scuff cap    sole resistance to hydrocarbons    toecap impact (200J) compression (15kN)    slipping resistant sole    slip resistance ceramic floor + detergent NaLS (sodium lauryl sulphate)    slip resistance ceramic floor + glycerine    energy absorption of seat region    antistatic footwear    water resistant upper    water resistant shoe    antiperforation midsole    cold insulation of sole complex    CI - 17°C    CI - 30°C    outsole resistant to hot contact    HRO +300°C    heat insulation of sole complex    HI    metatarsal protection    M    AN    ankle protection



**XSTICKER and XPEN**  
19x15,5 cm



**XBAG SPORT**  
42x34 cm



**COUNTER XDISPLAY**



**XBAG NYLON**  
50x30 cm



**XCARPET**  
60x40 cm



**XPOUF**  
35x35x35 cm



**XTOTEM**  
156x57x21 cm



**XEXPO**  
183x48x30 cm

**3PU PATENT**

**BULTRA**

page 6



**BULTRA  
RUBBER**

page 8

**3PU PATENT**



**3MOVE**

page 10

**3PU PATENT**

**3HYBRID**

page 13

**3PU PATENT**

**3CROSS**

page 19

**3PU PATENT**

**3RUN**

page 22

**KUBE**

page 25

**ERGO SAFE**

page 30

**STABILE**

page 32

**ACTION**

page 34

**HARD ROCK**

page 36

**DIELECTRIC LINE**

page 39

**CITY**

page 42

**ACCESSORIES**

page 44

**STANDARDS**

page 45

**ADVERTISING**

page 46

1<sup>st</sup> edition - rev.2

**GIASCO**  **TM**  
SAFETY SHOES



[www.giasco.com](http://www.giasco.com)

Via Zaupa, 50 • 36072 Chiampo (VI) - Italy  
T. +39 0444 624477 • F. +39 0444 623085  
E. [giasco@giasco.com](mailto:giasco@giasco.com)

