

Codice art. 20.02.25.02 (Bianco)

Codice art. 20.02.25.03 (Nero)

Modello: YX152

MASCHERINA FFP2 NR YX152

CE 0598



DISPOSITIVO DI PROTEZIONE INDIVIDUALE CAT. III

La mascherina FFP2 YX152, è un dispositivo di protezione individuale che protegge le vie respiratorie da particelle non oleose come polvere, polline, polvere industriale, virus dell'influenza e particelle sottili di inquinamento dell'aria (PM2.5).

CARATTERISTICHE

- Efficacia di filtrazione batterica (BFE): 95%
- Nasello regolabile – due elastici per orecchie/lacci nucali – gancetti estensori per nuca – cuciture termosaldate
- Dispositivo di protezione individuale monouso
- Resistente agli spruzzi
- Confezione da 20 pezzi in busta singola
- Dotate di foglio informativo da leggere prima di ogni utilizzo

DESCRIZIONE

MATERIALI	5 strati di tessuto non tessuto (TNT) in polipropilene. Elastici per sostegno alle orecchie anallergici
COLORE	Bianco - Nero
PULIZIA	Confezione riciclabile: una volta utilizzate, le mascherine vanno gettate nell'indifferenziata, salvo diverse indicazioni.
CONSERVAZIONE	Vanno conservate lontano da fonti di calore e luce diretta del sole. La temperatura di conservazione ideale è tra i -20°C e i +40°C. Proteggere il DPI da umidità e agenti atmosferici. Condizione massima di umidità: 80%.
IMPORTATORE	Prodotto importato da PM2 Services srl. Per la data di produzione, la data di scadenza e il lotto, fare riferimento al confezionamento o alle informazioni inserite in fattura.
PRODUTTORE	HUNAN EEXI TECHNOLOGY&SERVICE CO., LTD

PRESTAZIONI DELLA MASCHERINA FILTRANTE

Classificazione	Limiti massimi ammissibili di resistenza nell'atto respiratorio applicabili alle semi-maschere con e senza valvola		
	Flusso in inalazione		Flusso in esalazione
	30 l/min	95 l/min	160 l/min
FFP1	0,6	2,1	3,0
FFP2	0,7	2,4	
FFP3	1,0	3,0	
YX152	0,45	1,9	2,75
TEST	PARAMETRI FFP2 EN 149:2001 + A1:2009		YX152 FFP2 SCORE
Total inward Leakage	< 8%		6,43%
Carbondioxide Shll	< 1 %		0,48%
Sodium Chlorite	< 6 %		4,6%
Paraffin Oil	< 6 %		5,8%

CERTIFICAZIONE

La mascherina FFP2 YX152 è certificata CE 0598 (Conformità Europea):

- Ente certificatore SGS FIMKO OY (Body n° 0598)
- Registrazione n° FI20/966321

MARCATURA/NORME

La mascherina FFP2 YX152 è:

- **Dispositivo di Protezione Individuale di Cat. III** secondo il Reg. (UE) 2016/425.
Questo regolamento stabilisce i requisiti di progettazione, fabbricazione e libera circolazione nell'Unione Europea
- Risponde alla Norma Europea: **EN 149:2001+A1:2009**

Certificate CN21/42014

The management system of

Hunan EEXI Technology & Service Co., Ltd.

No.6, North of Pingtou Road, Liuyang Hi-Tech Industrial Development Zone, Hunan, 410300, P.R. China

has been assessed and certified as meeting the requirements of

Regulation (EU) 2016/425 Module D

For the following activities

Manufacture of the FFP2 Protective Respirators
(Note: all products marked CE0598 must have a valid EU Type Examination Certificates issued under Module B or a valid EC type-examination certificate issued under Article 10 of the PPE Directive 89/686/EEC.)

This certificate is valid from 5 January 2021 until 4 January 2024 and remains valid subject to satisfactory surveillance audits.
Re certification audit due before 29 November 2023
Issue 1. Certified since 5 January 2021

Authorised by



SGS FIMKO OY, Notified Body 0598

Takomitie 8, FI-00380 Helsinki, Finland
t +358 9 696 361 f +358 9 692 5474 www.sgs.com



FINAS
Finnish Accreditation Service
S003 (EN ISO/IEC 17065)

Page 1 of 1



HUNAN EEXI TECHNOLOGY&SERVICE CO.,LTD
NO.6, NORTH OF PINGTOU ROAD, LIUYANG HI-TECH INDUSTRIAL DEVELOPMENT ZONE, HUNAN,
CHINA

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Description : (A)Particle filtering half mask
 Claimed : FFP2

 Style No. : YX152
 Composition : (A)non-woven fabric, melt-blown fabric, bridge of nose, ear band
 Sample Color : (A)WHITE
 Manufacturer : HUNAN EEXI TECHNOLOGY&SERVICE CO.,LTD

 Test Performed : Selected test(s) as requested by applicant

 Sample Receiving Date : Jul 10, 2020
 Testing Period : Jul 13, 2020 - Jul 22, 2020
 Test Result(s) : Unless otherwise stated the results shown in this test report refer only to the sample(s) tested, for further details, please refer to the following page(s).

Conclusion:

Sample No.	Recommendation Level
(A)	FFP2 NR

Signed for and on behalf of
SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd Testing Center

Sara Guo (Account Executive)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Test Result

Personal Protective Equipment - Respiratory Protective Devices- Filtering Half Masks to Protect against Particles- Requirements, Testing, Marking

EN 149:2001+A1:2009

Clause 7.4 Packaging

(EN 149:2001+A1:2009 Clause 8.2)

Test Requirement	Results	Comment
Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.	Comply	Pass

Clause 7.5 Material

(EN 149:2001+A1:2009, Clause 8.2 & 8.3.1 & 8.3.2)

Test Requirement	Results	Comment
Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.	Comply	Pass
After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps.	Comply	
When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse.	Comply	
Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.	Comply	

Clause 7.6 Cleaning and Disinfecting

(EN 149:2001+A1:2009, Clause 8.4 & 8.5 & 8.11)

Test Requirement	Results	Comment
If the particle filtering half mask is designed to be re-usable, the materials used shall withstand the cleaning and disinfecting agents and procedures to be specified by the manufacturer. With reference to 7.9.2, after cleaning and disinfecting the re-usable particle filtering half mask shall satisfy the penetration requirement of the relevant class.	Not applicable (Not designed to be re-usable)	N.A.

Clause 7.7 Practical Performance

(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results	Comment
The particle filtering half mask shall undergo practical performance tests under realistic conditions. These general tests serve the purpose of checking the equipment for imperfections that cannot be determined by the tests described elsewhere in this standard.	No imperfections	Pass



Clause 7.8 Finish of Parts

(EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
Parts of the device likely to come into contact with the wearer shall have no sharp edges or burrs.	No sharp edges or burrs	Pass

Clause 7.9.1 Total Inward Leakage

(EN 149:2001+A1:2009, Clause 8.5)

Test Requirement	Results	Comment
The total inward leakage consists of three components: face seal leakage, exhalation value leakage(if exhalation value fitted) and filter penetration. For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than: 25% for FFP1, 11% for FFP2, 5% for FFP3 and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than: 22% for FFP1, 8% for FFP2, 2% for FFP3	Detail refer to Appendix 1	Pass

Appendix 1: Summarization of Test Data

Inward Leakage Test Data

Subject	Sample No.	Condition	Walk(%)	Head Side/side(%)	Head up/down(%)	Talk(%)	Walk(%)	Mean(%)
Zhou	1	A.R.	5.45	6.43	6.86	7.07	4.58	6.08
Luo	2	A.R.	7.48	5.62	8.18	6.84	7.04	7.03
Lu	3	A.R.	6.29	6.73	5.95	5.00	6.46	6.09
Wang	4	A.R.	4.50	5.09	5.51	5.31	5.85	5.25
Bao	5	A.R.	7.94	5.47	7.84	6.22	7.66	7.03
Ding	6	T.C.	7.68	5.17	4.14	6.08	5.02	5.62
Li	7	T.C.	7.17	8.81	7.98	6.63	7.70	7.66
Chen	8	T.C.	5.49	5.95	4.87	6.39	5.03	5.55
Song	9	T.C.	6.56	5.94	6.38	6.59	6.18	6.33
Ye	10	T.C.	8.62	8.04	6.87	7.31	7.30	7.63

Facial Dimension(mm)

Subject	Face length	Face Width	Face Depth	Mouth Width
Chen	125	150	120	58
Lu	115	132	107	48
Zhou	115	135	106	52
Li	125	130	107	46
Luo	125	136	100	43
Zheng	128	140	112	55
Wang	120	147	103	48
Song	120	140	100	50
Bao	130	134	104	50
Ding	134	150	110	52

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SGS-CTI Technical Services (Shanghai) Co., Ltd.
Testing Center: 3rd Floor, Yishan Road, Xuhui District, Shanghai, China 200233

3rd Building, No. 889, Yishan Road, Xuhui District Shanghai, China 200233
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666 f (86-21) 64958763
t (86-21) 61402666 f (86-21) 64958763

www.sgs.com.cn
e sgs.china@sgs.com

Liu	120	135	117	50
Ye	126	137	105	52

Clause 7.9.2 Penetration of Filter Material

(EN 149:2001+A1:2009, Clause 8.11 & EN 13274-7:2019)

Test Requirement			Results	Comment
The penetration of the filter of the particle filtering half mask shall meet the requirements of the following table.			Detail refer to Appendix 2	Pass
Classification	Maximum penetration of test aerosol			
	Sodium chloride test 95 l/min	Paraffin oil test 95 l/min		
	% max.	% max.		
FFP1	20	20		
FFP2	6	6		
FFP3	1	1		

Appendix 2: Summarization of Test Data

Penetration of filter material

Aerosol	Condition	Sample No.	Penetration (%)
Sodium chloride test	As received	1	0.396
		2	0.425
		3	0.385
	Simulated wearing treatment	4	0.402
		5	0.367
		6	0.387
	Mechanical strength + Temperature conditioned	7	0.572
		8	0.602
		9	0.596
Paraffin oil test	As received	10	0.456
		11	0.571
		12	0.508
	Simulated wearing treatment	13	0.623
		14	0.548
		15	0.492
	Mechanical strength + Temperature conditioned	16	0.565
		17	0.773
		18	0.687
Flow conditioning : Single filter: 95.0 L/min			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

Clause 7.10 Compatibility with Skin

(EN 149:2001+A1:2009, Clause 8.4 & 8.5)

Test Requirement	Results	Comment
Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.	No irritation or any other adverse effect to health	Pass

Clause 7.11 Flammability

(EN 149:2001+A1:2009, Clause 8.6)

Test Requirement	Results	Comment
The material used shall not present a danger for the wearer and shall not be of highly flammable nature When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.	Detail refer to Appendix 3	Pass

Appendix 3: Summarization of Test Data

Flammability

Condition	Sample No.	Result
As received	1	NIL
	2	NIL
Temperature conditioned	3	NIL
	4	NIL

Clause 7.12 Carbon Dioxide Content of The Inhalation Air

(EN 149:2001+A1:2009, Clause 8.7)

Test Requirement	Results	Comment
The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)	Detail refer to Appendix 4	Pass

Appendix 4: Summarization of Test Data

Carbon Dioxide Content of The Inhalation Air

Condition	Sample No.	Result(%)
As received	1	0.4824
	2	0.4817
	3	0.4805
		Mean value:0.48

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Clause 7.13 Head Harness

(EN 149:2001+A1:2009, Clause 8.4 & 8.5)

Test Requirement	Results	Comment
The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.	Comply	Pass
The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.	Comply	

Clause 7.14 Field of Vision

(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results	Comment
The field of vision is acceptable if determined so in practical performance tests.	Comply	Pass

Clause 7.15 Exhalation Valve(s)

(EN 149:2001+A1:2009, Clause 8.2 & 8.9.1 & 8.3.4 & 8.8)

Test Requirement	Results	Comment
(a) A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.	Not applicable due to No exhalation valve	N.A.
(b) If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.	Not applicable due to No exhalation valve	
(c) Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.	Not applicable due to No exhalation valve	
(d) When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10N applied for 10 s.	Not applicable due to No exhalation valve	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSI Standards Technical Services (Shanghai) Co., Ltd.
Testing Center

3rd Building, No. 889, Yishan Road, Xuhui District Shanghai, China 200233
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666 f (86-21) 64958763
t (86-21) 61402666 f (86-21) 64958763

www.sgs.com
sgs.china@sgs.com

Clause 7.16 Breathing Resistance
(EN 149:2001+A1:2009, Clause 8.9)

Test Requirement				Results	Comment
The penetration of the filter of the particle filtering half mask shall meet the requirements of the following table.				Detail refer to Appendix 5	Pass
Classification	Maximum permitted resistance (mbar)				
	Inhalation		Exhalation		
	30 l/min	95 l/min	160 l/min		
FFP1	0.6	2.1	3.0		
FFP2	0.7	2.4	3.0		
FFP3	1.0	3.0	3.0		

Appendix 5: Summarization of Test Data

Breathing resistance (mbar)

	Flow rate(l/min)	1					2					3					
		A	B	C	D	E	A	B	C	D	E	A	B	C	D	E	
As received	Inhalation	30	0.4	0.5	0.4	0.5	0.4	0.4	0.4	0.5	0.5	0.5	0.5	0.4	0.4	0.5	0.5
		95	1.9	1.9	1.9	1.8	1.9	2.0	1.9	1.8	2.0	1.8	1.9	2.0	2.0	1.8	1.9
	Exhalation	160	2.8	2.7	2.7	2.8	2.8	2.7	2.7	2.8	2.7	2.7	2.8	2.8	2.7	2.8	2.7
Simulated wearing treatment	Inhalation	30	0.5	0.4	0.5	0.5	0.4	0.4	0.5	0.5	0.4	0.5	0.4	0.4	0.5	0.5	0.4
		95	1.9	2.0	1.9	1.9	1.9	2.0	2.0	1.9	1.9	2.0	2.0	1.9	1.9	2.0	1.9
	Exhalation	160	2.7	2.8	2.7	2.7	2.8	2.8	2.7	2.7	2.8	2.8	2.7	2.7	2.7	2.8	2.7
Temperature conditioned	Inhalation	30	0.3	0.4	0.3	0.4	0.3	0.3	0.4	0.3	0.3	0.4	0.3	0.4	0.3	0.3	0.4
		95	1.9	2.0	1.9	1.9	2.0	2.0	1.9	1.9	2.0	2.0	1.9	1.9	2.0	2.0	1.9
	Exhalation	160	2.8	2.7	2.7	2.8	2.7	2.7	2.8	2.7	2.8	2.7	2.8	2.7	2.7	2.8	2.7

A: facing directly ahead; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSI Standards Technical Services (Shanghai) Co., Ltd.
Testing Center

3rd Building, No. 889, Yishan Road, Xuhui District Shanghai, China 200233
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666 f (86-21) 64958763
t (86-21) 61402666 f (86-21) 64958763

www.sgs.com
sgs.china@sgs.com

Clause 7.17 Clogging

(EN 149:2001+A1:2009, Clause 8.9 & 8.10)

Test Requirement	Results	Comment																			
<p><u>Clause 7.17.2 Breathing resistance</u> <u>Valved particle filtering half masks:</u> After clogging the inhalation resistances shall not exceed: FFP1: 4 mbar, FFP2: 5 mbar, FFP3: 7 mbar at 95L/min continuous flow The exhalation resistance shall not exceed 3 mbar at 160 L/min continuous flow.</p> <p><u>Valveless particle filtering half masks:</u> After clogging the inhalation and exhalation resistances shall not exceed: FFP1: 3 mbar, FFP2: 4 mbar, FFP3: 5 mbar at 95L/min continuous flow</p>	Optional for single shift device only	N.A.																			
<p><u>Clause 7.17.3 Penetration of filter material</u> All types (valved and valveless) of particle filtering half masks claimed to meet the clogging requirement shall also meet the requirements.</p> <table border="1"> <thead> <tr> <th rowspan="3">Classification</th> <th colspan="2">Maximum penetration of test aerosol</th> </tr> <tr> <th>Sodium chloride test 95 l/min</th> <th>Paraffin oil test 95 l/min</th> </tr> <tr> <th>%</th> <th>%</th> </tr> </thead> <tbody> <tr> <td></td> <td>max.</td> <td>max.</td> </tr> <tr> <td>FFP1</td> <td>20</td> <td>20</td> </tr> <tr> <td>FFP2</td> <td>6</td> <td>6</td> </tr> <tr> <td>FFP3</td> <td>1</td> <td>1</td> </tr> </tbody> </table>	Classification	Maximum penetration of test aerosol		Sodium chloride test 95 l/min	Paraffin oil test 95 l/min	%	%		max.	max.	FFP1	20	20	FFP2	6	6	FFP3	1	1	Optional for single shift device only	N.A.
Classification		Maximum penetration of test aerosol																			
		Sodium chloride test 95 l/min	Paraffin oil test 95 l/min																		
	%	%																			
	max.	max.																			
FFP1	20	20																			
FFP2	6	6																			
FFP3	1	1																			

Clause 7.18 Demountable Parts

(EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
All demountable parts (if fitted) shall be readily connected and secured, where possible by hand	Comply	Pass

Test	Uncertainty
Total inward leakage	3.4%
Penetration of filter material	4.8%
Carbon dioxide content of the inhalation air	3.9%
Breathing resistance (30L/min)	5.9%
Breathing resistance (95L/min)	4.9%
Breathing resistance (160L/min)	4.3%




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS (China) Technical Services (Shanghai) Co., Ltd. 3rd Building, No. 889, Yishan Road, Xuhui District Shanghai, China 200233 t (86-21) 61402666 f (86-21) 64958763 www.sgs.com.cn
 中国·上海·徐汇区宜山路889号3号楼 邮编: 200233 t (86-21) 61402666 f (86-21) 64958763 e sgs.china@sgs.com

Sample Photo

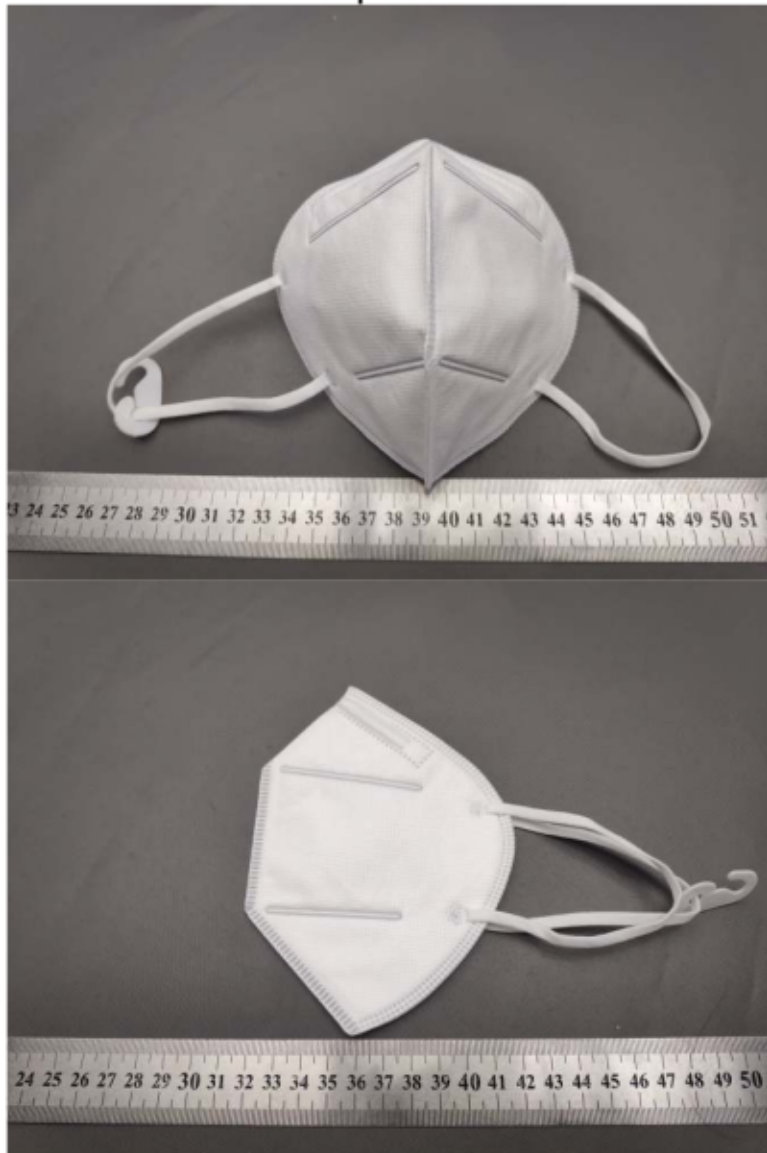

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



3rd Building, No. 889, Yishan Road, Xuhui District Shanghai, China 200233
 中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666 f (86-21) 64958763
 t (86-21) 61402666 f (86-21) 64958763

www.sgs.com
sgs.china@sgs.com

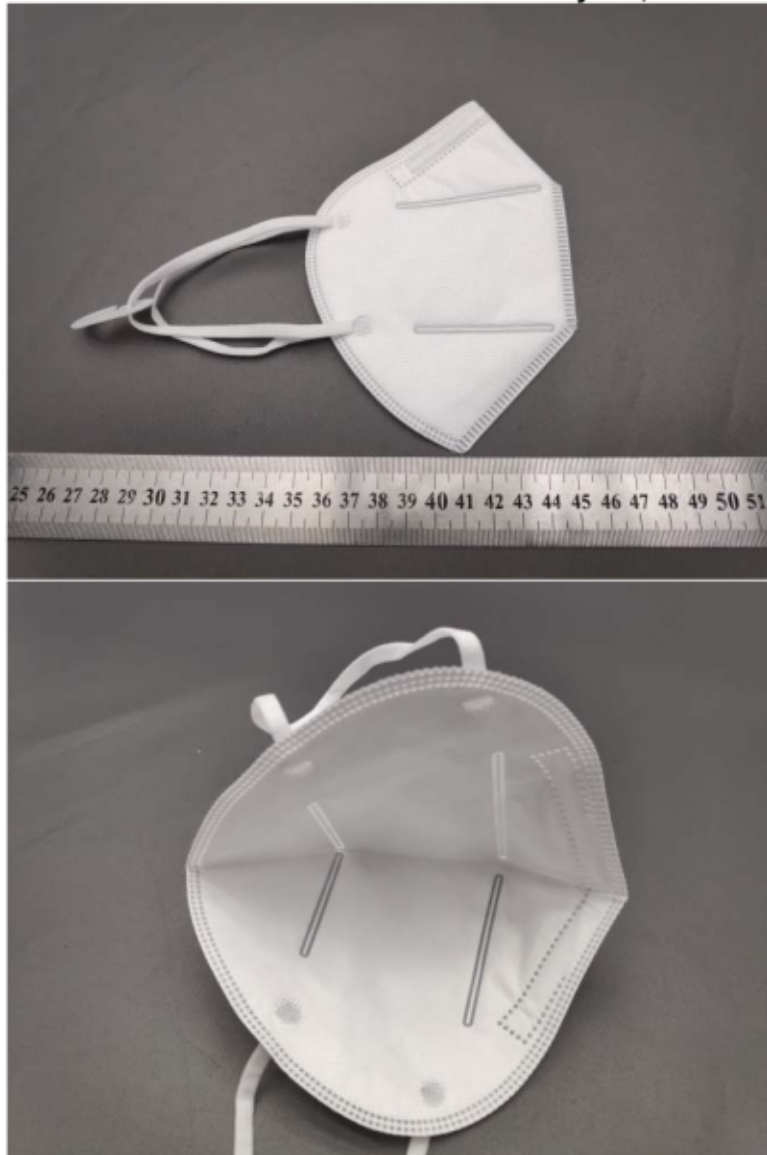

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3 rd Building, No. 889, Yishan Road, Xuhui District Shanghai, China 200233	t (86-21) 61402666	f (86-21) 64958763	www.sgs.com
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233	t (86-21) 61402666	f (86-21) 64958763	sgs.china@sgs.com

Hunan EEXI Technology & Service Co.,Ltd


No.6, North of Pingtuo Road,
Liuyang Hi-Tech Industrial Development Zone,
Hunan,
China

It is certified that the manufacturer's technical file and the PPE product detailed on page 2 have been assessed and found to be in accordance with

Regulation (EU) 2016/425 Module B, EU type-examination

This certificate is valid from 10 February 2021 until 10 February 2026
3. Certified since 6 August 2020

Authorised by



FINAS
Finnish Accreditation Service
S003 (EN ISO/IEC 17065)

SGS FIMKO OY, Notified Body 0598
Takomatie 8, FI-00380, Helsinki, Finland
t +358 9 696 361 f +358 9 692 5474 www.sgs.com

Page 1 of 2



This document is issued by the Company subject to its General Conditions of Certification Services accessible at www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. The authenticity of this document may be verified at <http://www.sgs.com/en/certified-clients-and-products/certified-client-directory>. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Hunan EEXI Technology & Service Co.,Ltd

Regulation (EU) 2016/425 Module B, EU type-examination

Issue 3

PPE Product

- a) Eexilnherent (logo) YX152 particle filtering half mask, consisting of a five layer (polypropylene) disposable face mask, with nose clip, and polyester ear loops with polypropylene hook, available in seven colourways: Black, Blue, Green, Grey, Pink, Red or White;
- b) Eexilnherent (logo) YX153 particle filtering half mask, consisting of a five layer (polypropylene) disposable face mask, with polypropylene valve, nose clip, and polyester ear loops with polypropylene hook, available in seven colourways: Black, Blue, Green, Grey, Pink, Red or White.

It is certified that the manufacturer's technical file and the above mentioned PPE have been assessed and found to meet the applicable Essential Health and Safety Requirements in Annex II of Regulation (EU) 2016/425 Personal Protective Equipment

The following have been applied:

EN 149:2001+A1:2009 (Respiratory protective devices - filtering half masks to protect against particles) device classification: FFP2 NR.

This certificate is issued on the strict condition that appropriate checks on manufactured PPE, as detailed in Article 19 (c) of the Regulation are implemented and maintained while the model is in production

Certification is based on technical file reference:

YX152/YX153, Rev 2, dated: 2021-02-02.

SGS Reference Number UK/CRS 241545.

This certificate remains the property of SGS Fimko Oy to whom it must be returned on request.



EU Declaration of Conformity

Manufacturer: Hunan EEXI Technology & Service Co., Ltd.
Address: No.6, North of Pingtou road, Liuyang Hi-Tech industrial development zone, Hunan, China

declares that the new PPE described hereafter

Product name	Particle filtering half mask
Model	YX152, YX153
Standard	EN 149 : 2001+A1 : 2009
Classification	FFP2 NR

is in conformity with the Regulation (EU) 2016/425 and with harmonized standard EN 149:2001 + A1:2009

performed the EU type-examination (Module B) and issued the EU type-examination certificate

FI20/966321

performed the EU type-examination (Module C2) and issued the EU type-examination certificate

CN20/42194

Notified Body information

Module B	Module C2
SGS Fimko Oy Takomotie 8, FI-00380 Helsinki, Finland Notified Body No. 0598	SGS Fimko Oy Takomotie 8, FI-00380 Helsinki, Finland Notified Body No. 0598

Signed for on behalf of Company

Name: Robin Liu

Position: CEO & Owner

Date: 2020-08-18

Signature: *Robin Liu*

